


Material: Brass Nickel Plated
Working Temperature: -40 ÷ 150 C°
Working Temperature: -40 ÷ 302 F°
Working Pressure (max): 25 bar
Working Pressure (max): 363 psi
Vacuum: -99 kPa
Vacuum: Hg
Conformity:

Conformity: RoHS
Conformity:
Conformity:
Conformity:
Application Pneumatic circuits

MC20

Taper Male Tee

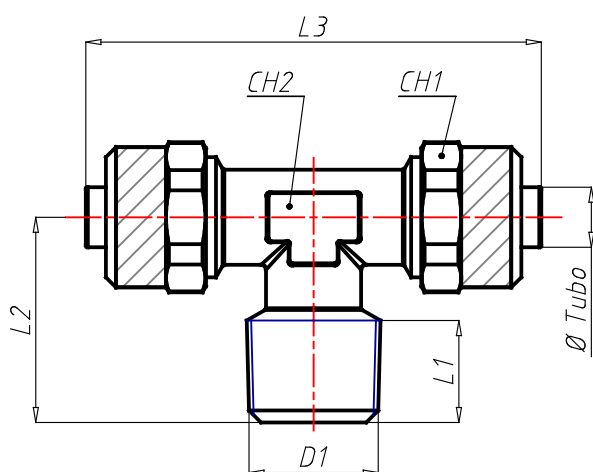

MC20

3D

NAME	CODE	TYPE	VAR_E_TUBO	VAR_I_TUBO	D1	L1	L1IN	L2	L2IN	L3	L3IN	CH1	CH2	G	OZ	WTF	WPP	NN
02100031	02100031	MC20 06 18	6	4	R1/8	8	.315	17	.669	45	1.772	12	8	27	.952	-40 ÷ 302	363	0
02100032	02100032	MC20 06 14	6	4	R1/4	11	.433	20,5	.807	45,5	1.791	12	10	35,2	1.242	-40 ÷ 302	363	0
02100041	02100041	MC20 08 18	8	6	R1/8	8	.315	17,5	.689	45,5	1.791	14	10	33,6	1.185	-40 ÷ 302	363	0
02100042	02100042	MC20 08 14	8	6	R1/4	11	.433	20,5	.807	45,5	1.791	14	10	37,7	1.330	-40 ÷ 302	363	0
02100052	02100052	MC20 10 14	10	8	R1/4	11	.433	21,5	.846	51	2.008	16	11	48	1.693	-40 ÷ 302	363	0

02100053	02100053	MC20 10 38	10	8	R3/8	11,5	.453	22,5	.886	51	2.008	16	11	51,1	1.802	-40 ÷ 302	363	0
02100063	02100063	MC20 12 38	12	10	R3/8	11,5	.453	24,5	.965	60	2.362	18	14	69,5	2.452	-40 ÷ 302	363	0
02100064	02100064	MC20 12 12	12	10	R1/2	14	.551	28	1.102	61	2.402	18	17	99,4	3.506	-40 ÷ 302	363	0
02100084	02100084	MC20 15 12	15	12,5	R1/2	14	.551	28	1.102	68	2.677	22	17	108,3	3.820	-40 ÷ 302	363	0
02109021	02109021	MC20 05 18	5	3	R1/8	8	.315	17	.669	43	1.693	8	8	17,5	.617	-40 ÷ 302	363	0