
cmatic®
PNEUMATIC FITTINGS

IQNET 9001:2015

IQNET 14001:2015
& 45001:2015

Material:	Zinc Plated Steel		**Conformity:**	RoHS
Working Temperature:	-30 ÷ 100	C°	**Conformity:**	
Working Temperature:	-22 ÷ 212	F°	**Conformity:**	
Working Pressure (max):	350	bar	**Conformity:**	
Working Pressure (max):	5076	psi	**Application**	Hydraulics
Vacuum:		kPa		
Vacuum:		Hg		
Conformity:				

Q091
45° Hose Connection

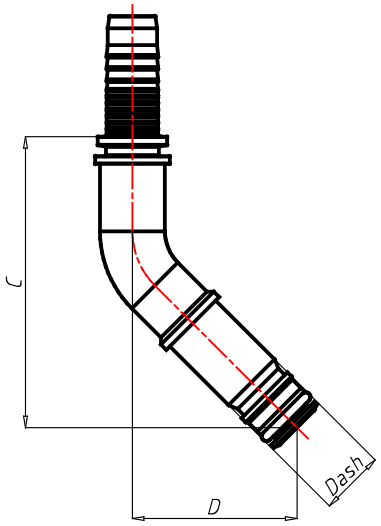

Q091 3D

NAME	CODE	TIPO	DN_DASH	HOSE_ID_INCH_	HOSE_ID_MM_	C_CUT_OFF_MM_	C_CUT_OFF_IN	D_DROP_MM_	D_DROP_IN	G	OZ	WTF	WPP	NN
Q0810030	Q0810030	QO91 0414	04	1/4	6,2	62,2	2.449	37,6	1.480	41,7	1.471	-22 ÷ 212	5076	0
Q0810050	Q0810050	QO91 0638	06	3/8	9,5	67,6	2.661	40,3	1.587	72,3	2.550	-22 ÷ 212	5076	0
Q0810060	Q0810060	QO91 0812	08	1/2	12,9	76	2.992	43	1.693	122,2	4.310	-22 ÷ 212	5076	0
Q0810070	Q0810070	QO91 1234	12	3/4	19	97,5	3.839	56,4	2.220	275	9.700	-22 ÷ 212	5076	0

More info:
+39 0362 805246
cmatic@cmatic.it