


 Materiali	 Materials	 Werkstoffen	 Matériels	 Materiales
Corpo: Ottone nichelato CW614N o resina acetlica	Body: Nickel plated brass CW614N or acetal resin	Körper: vernickelt Messing CW614N oder acetalharz	Corps: Laiton nickelé CW614N ou résine acétale	Cuerpo: Latón niquelado CW614N o resina acetal
Pulsante: Resina acetlica	Sleeve: Acetal resin	Taste: Acetalharz	Bouton: Résine acétale	Pulsador: Resina acetal
Distanziale: Zinco	Spacer ring: Zinc	Distanzring: Zink	Rondelle d'épaisseur: Zinc	Arandela distanciadora: Zinc
Pinza: Acciaio SUS 301	Lock claws: SUS 301 Steel	Bremssattel: Edelstahl SUS 301	Pince: Acier SUS 301	Pinza: Acero SUS 301
Anello raccordo: Resina acetlica	Coupling ring: Acetal resin	Mitnehmer-ring: Acetalharz	Bague d'entraînement: Résine acétale	Anillo de conexión: Resina acetal
Guarnizione: NBR esente da silicone	Packing: NBR silicon free	Dichtung: NBR Silikonfrei	Joints: NBS sans silicone	Sello: NBR sin silicona
O-Ring: NBR esente da silicone	O-Ring: NBR silicon free	O-Ringe: NBR Silikonfrei	O-ring: NBS sans silicone	Junta tórica: NBR sin silicona
Attacco girevole: Ottone nichelato CW614N	Rotating body: Nickel plated brass CW614N	Schwenk-verbindung: vernickelt Messing CW614N	Connexion pivotante: Laiton nickelé CW614N	Conexión giratoria: Latón niquelado CW614N

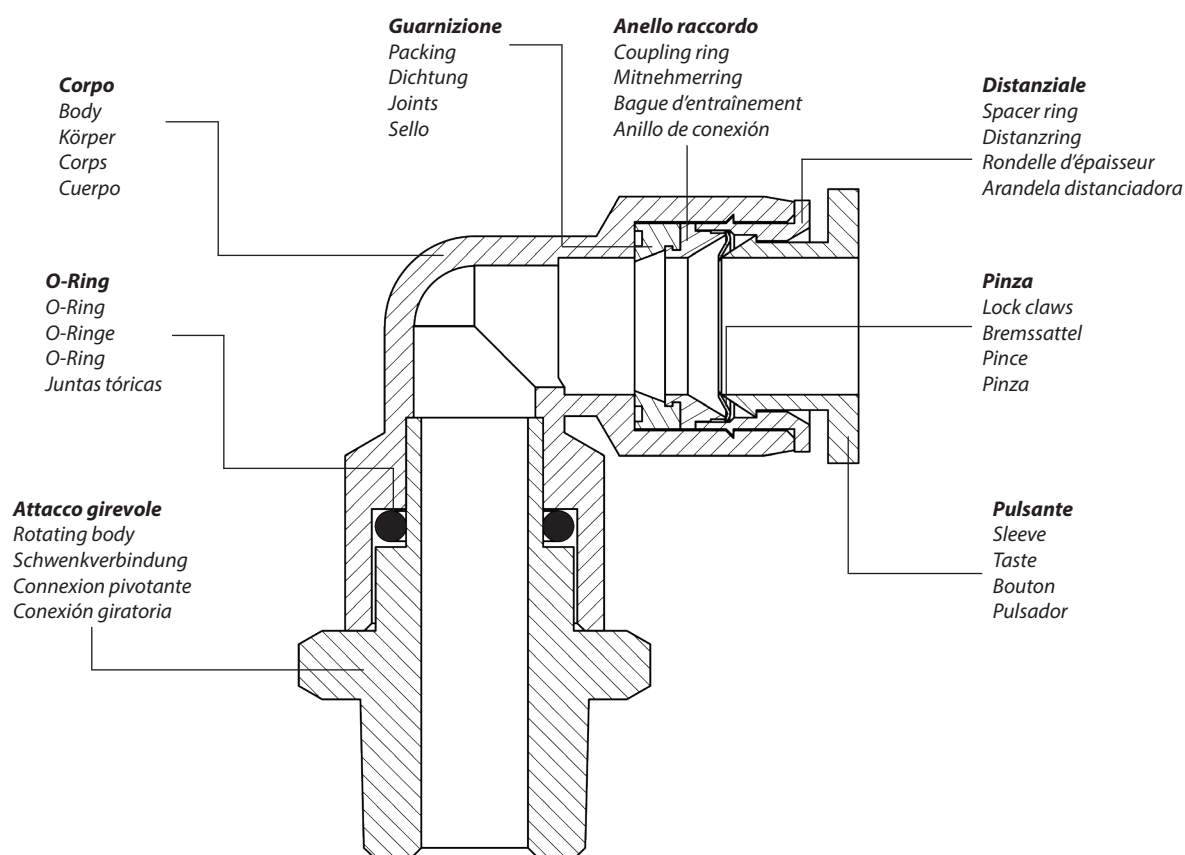

 Pressione e temperatura	 Pressure and Temperature	 Druck und Temperatur	 Pression et Température	 Presión y Temperatura
Tubo: Ø3 - Ø6 mm Pressione (temperatura di utilizzo 20°C): 10 Bar (150 PSI)	Tube: Ø3 - Ø6 mm Pressure (working temperature 20°C): 10 Bar (150 PSI)	Schlauch: Ø3 - Ø6 mm Druck (Betriebstemperatur von 20°C): 10 Bar (150 PSI)	Tuyau: Ø3 - Ø6 mm Pression (température d'utilisation de 20°C): 10 bar (150 PSI)	Tubo: Ø3 - Ø6 mm Presión (temperatura de funcionamiento 20 °C): 10 Bar (150 PSI)
Temperatura: 0°C / +60°C	Temperature: +32°F / +140°F	Temperatur: 0°C / +60°C	Température: 0°C / +60°C	Temperatura: 0°C / +60°C

Tubi consigliati
1)Poliuretano - 2)Poliammide - 3)Polietilene - 4)Nylon

Tuyaux recommandés
1)Polyuréthane 2) Polyamide 3) Polyéthylène 4) Nylon

Recommended tubes
1)Polyurethane - 2)Polyamide - 3)Polyethylene - 4)Nylon

Tubos recomendados
1) Poliuretano - 2) Poliamida - 3) Polietileno - 4) Nylon

Rohrempfehlungen
1)Polyurethan - 2)Polyamid - 3)Polyethylen - 4)Nylon

Fluido
Aria compressa (altri fluidi a richiesta)

Fluide
Air comprimé (autres fluides sur demande)

Fluid
Compressed air (other fluids on request)

Fluido
Aire comprimido (otros fluidos a petición)

Fluid
Druckluft (andere Medien auf Anfrage)

Filettatura	Thread types	Gewinde	Filetage	Roscado
BSPP cilindrica UNI-ISO228 - ISO16030 con O-Ring	BSPP parallel UNI-ISO228 - ISO16030 with O-ring	BSPP zylindrisch UNI-ISO228 - ISO16030 mit O-Ringen	BSPP cylindrique UNI-ISO228 - ISO 16030 avec O-ring	BSPP cilíndrico UNI-ISO 228 - ISO 16030 con junta tórica
BSPT conica UNI-ISO 7 teflonata	BSPT taper UNI-ISO 7 with teflon	BSPT konische UNI-ISO 7 mit Teflon	BSPT conique UNI-ISO7 teflonée	Teflón con recubrimiento BSPT UNI-ISO 7
Metrica ISO/R 262	Metric ISO/R 262	Metrische ISO/R 262	Métrique ISO/R 262	ISO/R 262 métrica

Diametri e filetti
Diametri da 3 mm a 6 mm - Filettature da M3 a 1/4"


Diamètres et filets
Diamètres de 3 mm à 6 mm - Filetages de M3 à 1/4"

Threads and diameters
Diameters from 3 mm to 6 mm - Threads from M3 to 1/4"

Durchmesser und Gewinde
Durchmesser von 3 mm bis 6 mm - Gewinde von M3 bis 1/4"

Diámetros y roscas
Diámetros de 3 mm a 6 mm - Roscas de M3 a 1/4"

RP 51K-C

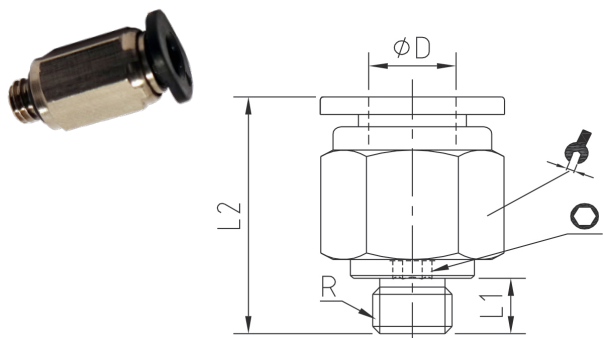

Diritto compatto maschio conico BSPT-metrico

Mini male straight taper BSPT-metric

Gerade Einschraubverschraubung konisches - metrische Gewinde "MINI"

Raccord mini droit male BSPT- métrique

Racor mini recto macho cónico con tórica BSPT- métrico

CODICE/CODE	ØD	R"	L1	L2	Ø	PEZZI/PIECES
RP51M303C	3	M3x0,5	3,5	15	8	10
RP51M503C	3	M5x0,8	3,5	16	8	10
RP51K1803C	3	R1/8	7,5	15	10	10
RP51M304C	4	M3x0,5	3,5	17,5	8	10
RP51M504C	4	M5x0,8	3,5	18,5	8	10
RP51M604C	4	M6x1,0	4	19	10	10
RP51M506C	6	M5x0,8	3,5	18	10	10
RP51M606C	6	M6x1,0	4	18,5	10	10
RP51K1806C	6	R1/8	7,5	18,5	10	10